VELOCIFERO

E. MOTORCYCLES

TECHNICAL DATA

RK
MICHAEL
BALLAUGH BRIDGE
SULBY BRIDG
BUNGALOW
CREG NA BAA
EAST MOUNTAIN GATE
B
KEPPLE GATE

RACE-X 7000 W

LITHIUM BATTERY
72 V / 6480 Wh

VELOCIFERO
RACE-X

VELOCIFERO

TECHNICAL DATA *RACE-X* 7000 W

COLORS: 🟨 ⬛ ▨

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	2010x760x1120
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	153 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	72 V
	Battery capacity	6480 Wh
	Charging Voltage	84 V
	Weight	43 Kg
MOTOR	Rated power	7000 W
	Rated Volt	72 V
	Torque	220Nm
	Maximum speed	110 Km/h
	Maximum distance with one charge	170 Km
CHARGER	Input voltage	110-240 V
	Rated output Voltage	84 V
	Rated current	40 A
	Charging time	2.5 hours
LIGHT	Headlight	LED
	Tail light	LED
SPEEDOMETER	Size	5 inch TFT
SUSPENSION	Front	Upside down telescopic fork
	Rear	Hydraulic mono shock suspension
BRAKE	Front	Hydraulic double disc brake,Φ320
	Rear	Hydraulic disc brake,Φ225
TIRE	Front	120/70-17
	Rear	160/60-15
FRAME	Materials	Iron-Aluminium alloy
CERTFICATE		EEC / L3e-A1

BEACHMAD 3000 W

SPORT

LITHIUM BATTERY
72 V / 2808 Wh

VELOCIFERO
5
ENERGY UNIT

VELOCIFERO

TECHNICAL DATA *BEACHMAD SPORT* 3000 W

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxHxWH(mm)	2046x725x1100
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	92 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	72 V
	Battery capacity	2080 Wh
	Charging Voltage	84 V
	Weight	20 Kg
MOTOR	Rated power	3000 W
	Rated Volt	72 V
	Torque	150 N•m
	Maximum speed	80 Km/h
	Maximum distance with one charge	70 Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	84 V
	Rated current	10 A
	Charging time	4 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	72 V
	Limited current	80 A
SPEEDOMETER	Size	5 inch TFT
SUSPENSION	Front	Hydraulic telescopic front fork
	Rear	Hydraulic single shock absober
BRAKE	Front	Hydraulic disc brake,Φ220
	Rear	Hydraulic disc brake,Φ190
TIRE	Size	23x7-10
FRAME	Materials	High-tensile steel
CERTFICATE		EEC

COLORS: ⬜ ⬛ 🟥

JUMP 3000 W

LITHIUM BATTERY 72 V / 2808 Wh

LITHIUM BATTERY 72 V / 3600 Wh

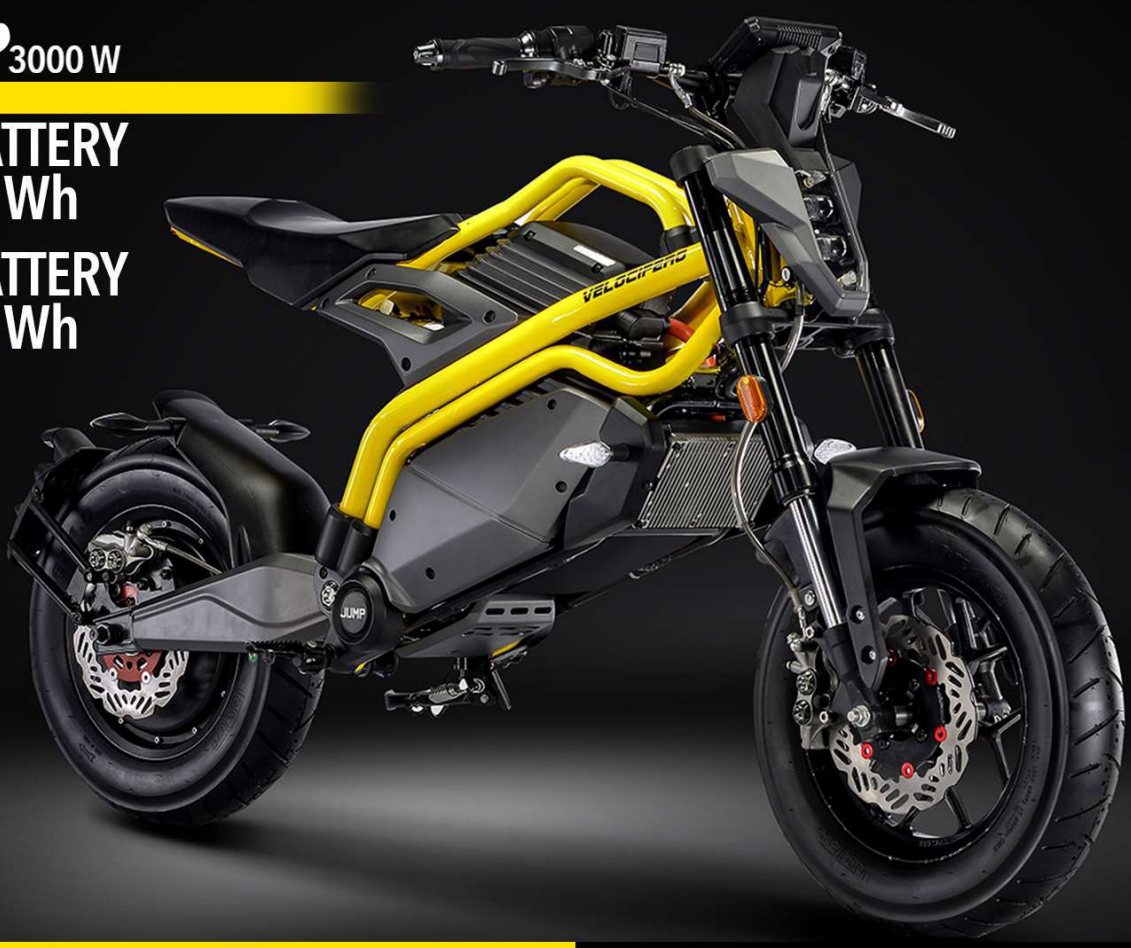

VELOCIFERO

TECHNICAL DATA *JUMP* 3000 W

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1830x780x1030
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	96.6 Kg

VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	72 V
	Battery capacity	2808 Wh | 3600 Wh
	Charging Voltage	84 V
	Weight	20 Kg | 20.6 Kg
MOTOR	Rated power	3000 W Peak 5000W
	Rated Volt	72 V
	Torque	Peak 175Nm
	Maximum rotate speed	900 r/min
	Maximum speed	90 Km/h
	Maximum distance with one charge	45 Km/h:85 Km | 45 Km/h:120Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	84 V
	Rated current	10 A
	Charging time	4-5 hours | 5-6 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	72 V
	Limited current	80 A
SPEEDOMETER	Size	5 inch TFT
SUSPENSION	Front	Upside down Telescopic fork,Φ33
	Rear	Hydraulic mono shock absorber progressive cantilever system
BRAKE	Front	Hydraulic disc brake,Φ220
	Rear	Hydraulic disc brake,Φ220
TIRE	Front	Tubeless 4.0-12
	Rear	Tubeless 90/100-12
FRAME	Materials	High-tensile steel
CERTFICATE		EEC / L1e-b / L3e-A1

COLORS: 🟨 ⬛ 🟥 ⬛

JUMP SCRAMBLER 3000 W

LITHIUM BATTERY 72 V / 2808 Wh

LITHIUM BATTERY 72 V / 3600 Wh

VELOCIFERO

TECHNICAL DATA *JUMP* SCRAMBLER 3000 W

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1800x750x995
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	94.1 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	72 V
	Battery capacity	2808 Wh | 3600 Wh
	Charging Voltage	84 V
	Weight	20 Kg | 20.6 Kg
	Rated power	3000 W Peak 5000W
	Rated Volt	72 V

COLORS: 🟨 🟥 ⬛

MOTOR	Torque	Peak 175Nm
	Maximum rotate speed	900 r/min
	Maximum speed	90 Km/h
	Maximum distance with one charge	45 Km/h:85 Km | 45 Km/h:120Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	84 V
	Rated current	10 A
	Charging time	4-5 hours | 5-6 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	72 V
	Limited current	80 A
SPEEDOMETER	Size	5 inch TFT
SUSPENSION	Front	Upside down Telescopic fork,Φ33
	Rear	Hydraulic mono shock absorber progressive cantilever system
BRAKE	Front	Hydraulic disc brake,Φ220
	Rear	Hydraulic disc brake,Φ220
TIRE	Front	Tubeless 130/70-12
	Rear	Tubeless 120/70-12
FRAME	Materials	High-tensile steel
CERTFICATE		EEC / L1e-b / L3e-A1

MAD-TRUCK 2000 W

LITHIUM BATTERY
60 V / 1200 Wh

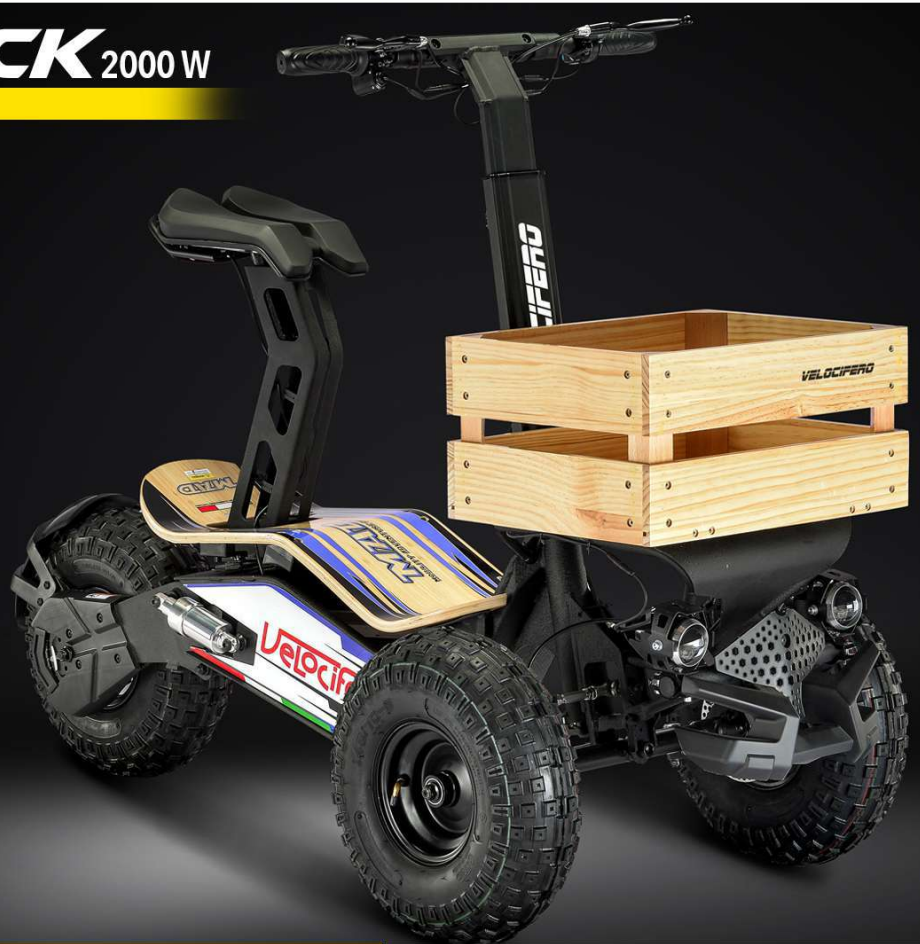

VELOCIFERO

TECHNICAL DATA MAD-TRUCK 2000 W

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1510x720x1150
	FOLD SIZE(mm)	1510x720x550
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	63 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	60 V
	Battery capacity	1200 Wh
	Charging Voltage	67.2 V
	Weight	8.8 Kg
MOTOR	Rated power	2000 W
	Rated Volt	60 V
	Torque	32 N•m
	Maximum speed	45 Km/h
	Maximum distance with one charge	35 Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	67.2 V
	Rated current	5 A
	Charging time	4 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	60 V
	Limited current	36 A
SUSPENSION	Rear	Double shock absorber
BRAKE	Front	(x2)mechanical disc,Φ140
	Rear	Mechanical disc,Φ140
TIRE	Size	145/70-6
FRAME	Materials	High-tensile steel
FINAL TRANSMISSION		Chain
CERTIFICATE		CE/EEC

ACCESSORIES 🔍

VLF MAD 2000 W

LITHIUM BATTERY
60 V / 1200 Wh

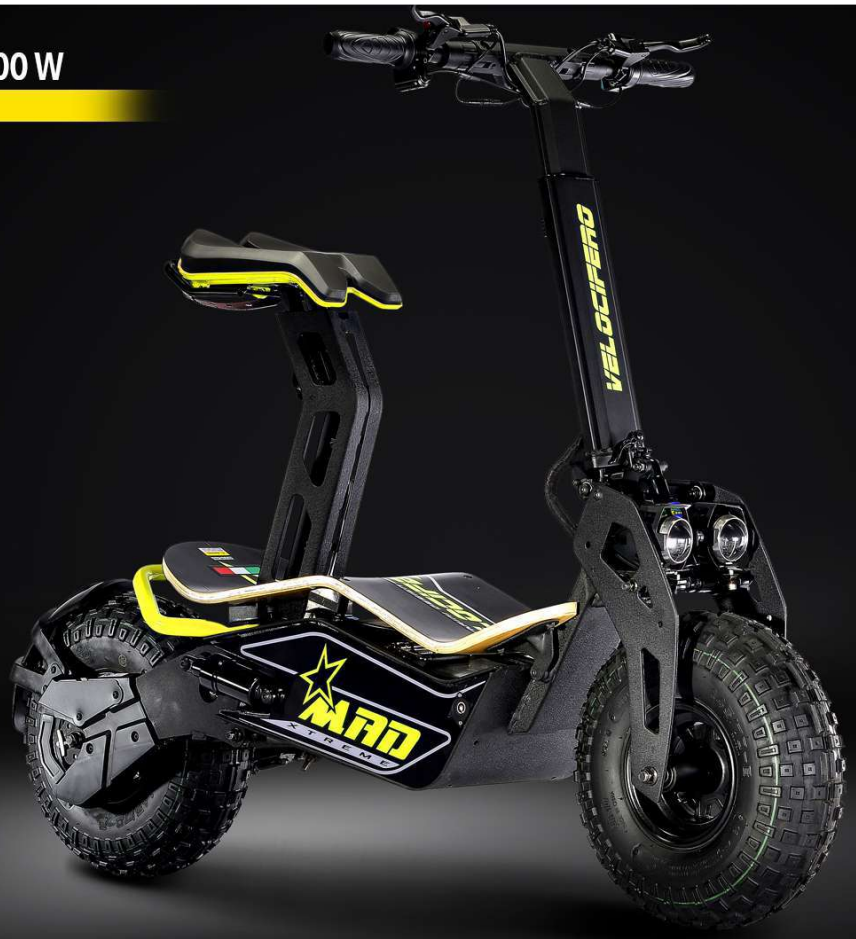

TECHNICAL DATA VLF MAD 2000 W

VELOCIFERO

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1350x590x1080
	FOLD SIZE(mm)	1350x320x570
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	48 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	60 V
	Battery capacity	1200 Wh
	Charging Voltage	67.2 V
	Weight	8.8 Kg
MOTOR	Rated power	2000 W
	Rated Volt	60 V
	Torque	32 N•m
	Maximum speed	50 Km/h
	Maximum distance with one charge	40 Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	67.2 V
	Rated current	3.5 A
	Charging time	6 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	60 V
	Limited current	40 A
SUSPENSION	Front	Earles front fork system
	Rear	Double shock absorber
BRAKE	Front	Mechanical disc,Φ140
	Rear	Mechanical disc,Φ140
TIRE	Size	145/70-6
FRAME	Materials	High-tensile steel
CERTIFICATE		CE

ACCESSORIES 🔍

VLF MAD 1600 W

LEAD ACID BATTERY
48 V / 576 Wh

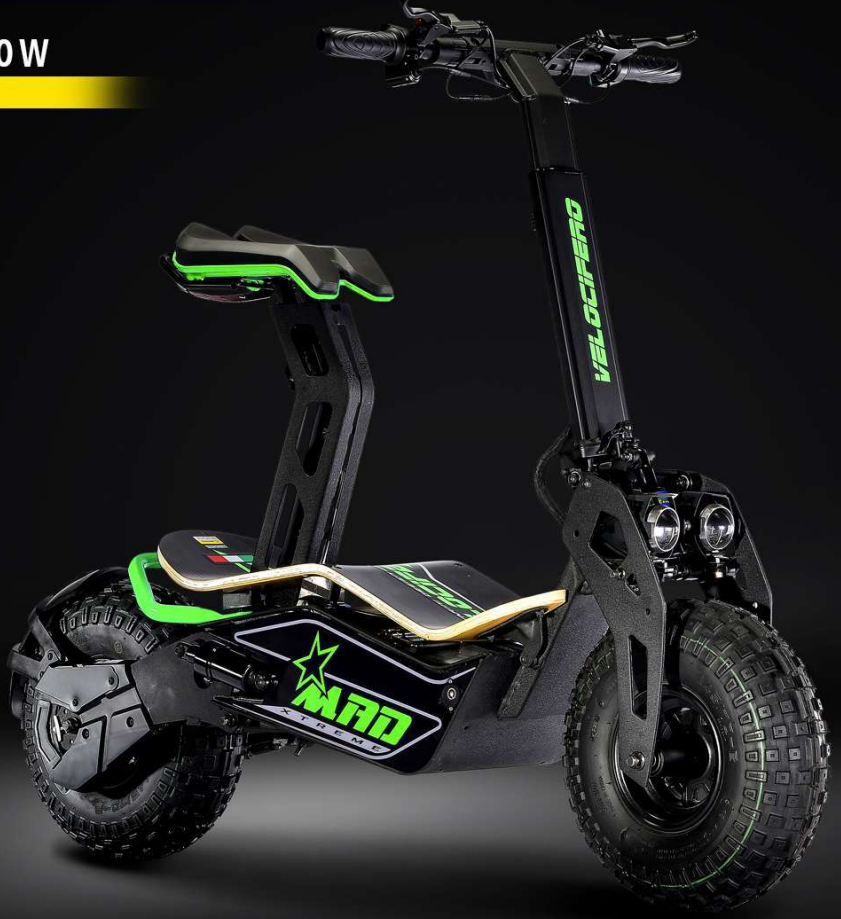

VELOCIFERO

TECHNICAL DATA VLF MAD 1600 W

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1350x630x1080
	FOLD SIZE(mm)	1350x320x570
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	53 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	48 V
	Battery capacity	576 Wh
	Charging Voltage	57.6 V
	Weight	15.5 Kg
MOTOR	Rated power	1600 W
	Rated Volt	48 V
	Torque	25 N•m
	Maximum speed	45 Km/h
	Maximum distance with one charge	30 Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	57.6 V
	Rated current	3.5 A
	Charging time	3-4 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	48 V
	Limited current	30 A
SUSPENSION	Front	Earles front fork system
	Rear	Double shock absorber
BRAKE	Front	Mechanical disc,Φ140
	Rear	Mechanical disc,Φ140
TIRE	Size	145/70-6
FRAME	Materials	High-tensile steel
CERTIFICATE		CE

ACCESSORIES 🔍

VLF MAD 1000 W

HUB MOTOR

LEAD ACID BATTERY
48 V / 576 Wh

TECHNICAL DATA VLF MAD 1000 W

ACCESSORIES 🔍

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1350x590x1080
	FOLD SIZE(mm)	1350x320x570
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	53 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	48 V
	Battery capacity	576 Wh
	Charging Voltage	57.6 V
	Weight	15.5 Kg
MOTOR	Rated power	1000 W
	Rated Volt	48 V
	Torque	53.6 N•m
	Maximum speed	40 Km/h
	Maximum distance with one charge	30 Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	57.6 V
	Rated current	3.5 A
	Charging time	3-4 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	48 V
	Limited current	25 A
SUSPENSION	Front	Earles front fork system
	Rear	Double shock absorber
BRAKE	Front	Mechanical disc,Φ140
	Rear	Mechanical disc,Φ140
TIRE	Size	Tubeless 135/65-8
FRAME	Materials	High-tensile steel
CERTIFICATE		CE

VLF MAD 810 W

LEAD ACID BATTERY
48 V / 576 Wh

VELOCIFERO
MAD
XTREME

TECHNICAL DATA *VLF MAD* 810 W

VELOCIFERO

ACCESSORIES

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1350x630x1080
	FOLD SIZE(mm)	1350x320x570
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	54 Kg
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	48 V
	Battery capacity	576 Wh
	Charging Voltage	57.6 V
	Weight	15.5 Kg
MOTOR	Rated power	810 W
	Rated Volt	48 V
	Torque	25 N•m
	Maximum speed	38 Km/h
	Maximum distance with one charge	38 Km
CHARGER	Input voltage	100-240 V
	Rated output Voltage	57.6 V
	Rated current	3.5 A
	Charging time	3-4 hours
LIGHT	Headlight	LED
	Tail light	LED
CONTROLLER	Rated Volt	48 V
	Limited current	30 A
SUSPENSION	Front	Earles front fork system
	Rear	Double shock absorber
BRAKE	Front	Mechanical disc,Φ140
	Rear	Mechanical disc,Φ140
TIRE	Size	Tubeless 145/70-6
FRAME	Materials	High-tensile steel
CERTIFICATE		CE/EEC

MINIMAD 800 W

LITHIUM BATTERY
48 V / 500 Wh

VELOCIFERO

TECHNICAL DATA *MINIMAD* 800 W

VELOCIFERO

PERFORMANCE INDEX	ITEM	TECHNICAL SPECIFICATIONS
DIMENSIONS	LxWxH(mm)	1085x595x1040
	FOLD SIZE(mm)	1085x350x310
PRODUCT WEIGHT	Vehicle weight in running order(with battery)	33 Kg
CYCLING REQUIREMENTS	Maximum Load	100 Kg
	Maximum speed	30 Km/h
	Maximum distance with one charge（20℃；75Kg）	25-30 Km
	Maximum climbing angle	18%
VEHICLE PARAMETERS	Working temperature	-5-45 degree celcius
	Storage temperature	-5-45 degree celcius
BATTERY	Rated Volt	48 V
	Battery capacity	500 Wh
	Charging Voltage	54.6 V
	Weight	2.8 Kg
MOTOR	Rated power	800 W
	Rated Volt	48 V
	Magnetic height	C 40
	Torque	36 N•m
CHARGER	Input voltage	100-240 V
	Rated output Voltage	54.6 V
	Rated current	2 A
	Charging time	5-6 hours
LIGHT	Headlight	LED
	Tail light	NA
CONTROLLER	Rated Volt	48 V
	Limited current	22 A
BRAKE	Front	NA
	Rear	mechanical disc,Φ120
TIRE	Size	Tubeless110/50-6.5
FRAME	Materials	high-tensile steel
CERTIFICATE		CE

COLORS: 🟨 ⬛ 🟥 🟧 ⬜ 🟦

ACCESSORIES



COD: 75500-01000-CA000



COD: 75400-01000-CA000



COD: 75400-01000-BK300



COD: 75500-01000-BK300



COD: 35900-01000-00000

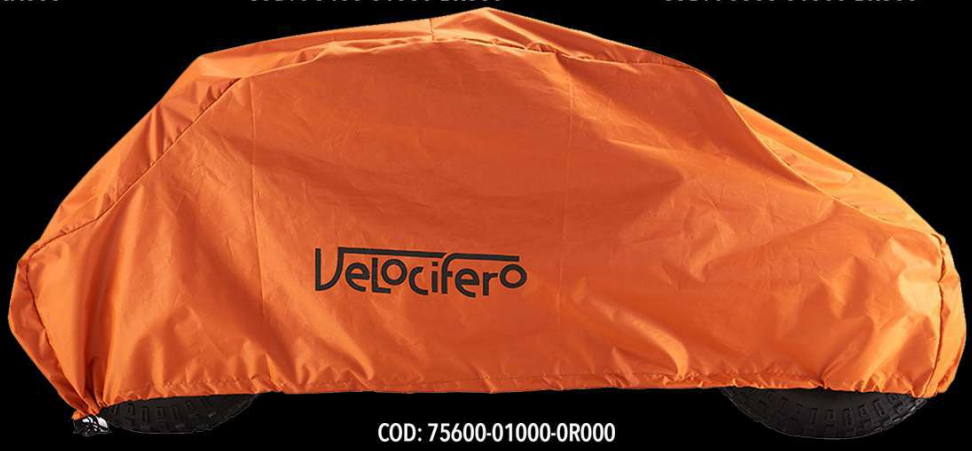

COD: 75600-01000-0R000